


Parts & Materials

Part No.	Qty.	Description	Material, Series 6336	
			A105	F316
1	1	Handle	C.S. Galvanized Plastic Cover	C.S. Galvanized Plastic Cover
2A/2B	2	Nut	C.S. Cadmium Plated	S.S. 316
3	1	Packing Ring	Graphite	Graphite
4	2	Spring Washer	Stainless Steel	Stainless Steel
5	1	Antistatic Stem	S.S. 316	S.S. 316
6	1	Gland Follower	S.S. 316	S.S. 316
7	1	Thrust Washer	Reinforced PTFE	Reinforced PTFE
8	1	Stem O-Ring	Viton®	Viton®
9	1	Ball	S.S. 316	S.S. 316
10	2	Seats	Devlon® V	Devlon® V
11	2	Body Seal	Graphite	Graphite
12	1	Body	ASTM A105N	ASTM A182 F316
13	2	End Connections	ASTM A105N	ASTM A182 F316L
14	1	Stop-Pin	Carbon Steel	S.S. 304
16	6/8/10	Bolt	ASTM A193 B7M	ASTM A193 B8M
17	1	Stop Washer	Stainless Steel	Stainless Steel
18	2	Body Seal	Graphite	Graphite

Pressure Temperature – D Seat

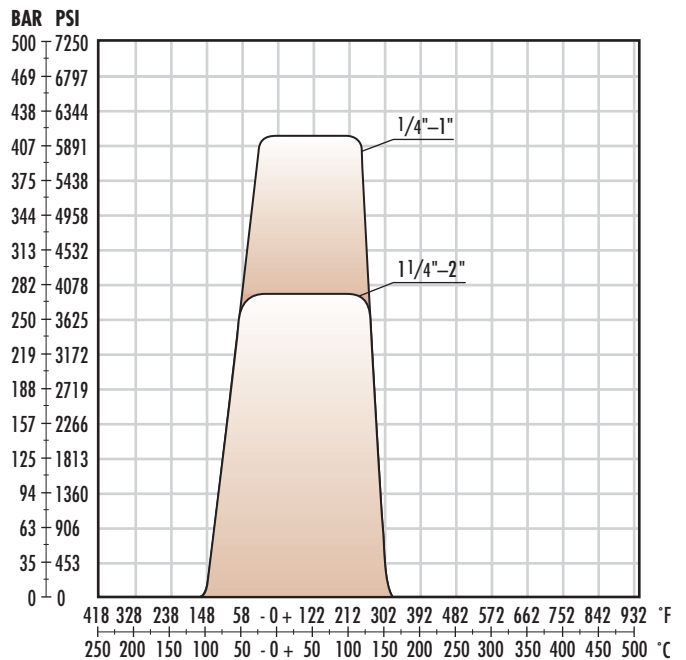

Soft Parts Repair Kit

Part No.	Qty.	Part Name	Material
3	1	Packing Ring	Graphite
7	1	Thrust Washer	RPTFE
8	1	Stem O-Ring	Viton®
10	2	Seats	Devlon® V
11	2	Body Seals	Grafoil®
18	2	Body Seals	Viton®

Flow Coefficient (Cv)

Size (in.) Full Port							
1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
8	8	8	25	34	100	100	100

Flow Data: Flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C). Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure of one PSI.